


# ALED

SURFACE  
IP54 / IK06

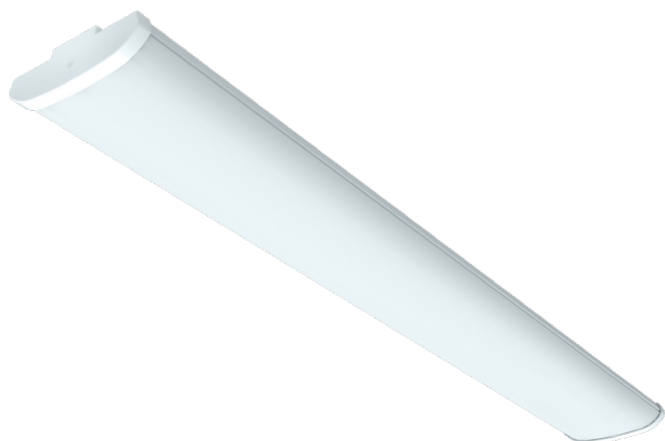

LED			IP54	IK06				5 years warranty	50,000 hrs L80/B10 Ta=25°C	220-240V 50-60Hz		CE
-----	--	--	------	------	--	--	--	------------------	----------------------------------	---------------------	--	----

on request



## ALED

**ALED**  
Surface

## ALED

cabled for LED tubes  
Surface

<b>LIGHT OUTPUT</b>	up to 8600 lm	depends of LED tubes
<b>EFFICIENCY</b>	up to 128 lm/W	depends of LED tubes
<b>WIRING</b>	ECG, on request: DALI, 1-10V On request: Emergency kit (1h, 3h, exclude 20W, 27W)	N/A
<b>CCT</b>	3000 - 4000K	depends of LED tubes
<b>CRI</b>	≥ 80 Ra	depends of LED tubes
<b>MATERIALS</b>		
> <b>Housing</b>	Sheet steel	Sheet steel
> <b>Diffuser</b>	Opal Polycarbonate	Opal Polycarbonate
> <b>End caps</b>	ABS	ABS
<b>LIGHT DISTRIBUTION</b>	Direct	Direct
<b>ADVANTAGES</b>	Impact-resistant (IK06)	Impact-resistant (IK06)
<b>SURFACE FINISH</b>	White color (RAL9003); other colors on request	White color (RAL9003); other colors on request
<b>ACCESSORIES</b>	Cable gland for end cup PG 11 (purchase code: CG-PG11)	N/A

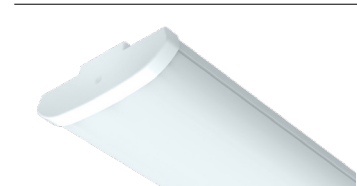


ELEGANT OPAL ABS END CAPS




OPAL POLYCARBONATE (PC)

drawing ALED




drawing ALED, cabled for LED Tubes



Net lumen output	CCT	Power	Wiring	Dimensions	Weight	ACS	Purchase code
(lm)	(K)	(W)		(mm)	(kg)	#	
2300	3000	20	ECG	A: 612	2.01	1	AS.60-20-2300/9.3/IP54O2
2500	4000	20	ECG	A: 612	2.01	1	AS.60-20-2500/9.4/IP54O2
3100	3000	27	ECG	A: 612	2.01	1	AS.60-27-3100/9.3/IP54O2
3300	4000	27	ECG	A: 612	2.01	1	AS.60-27-3300/9.4/IP54O2
4600	3000	36	ECG	A: 1172	2.54	1	AS.120-36-4600/9.3/IP54O2
4900	4000	36	ECG	A: 1172	2.54	1	AS.120-36-4900/9.4/IP54O2
6400	3000	52	ECG	A: 1172	2.54	1	AS.120-52-6400/9.3/IP54O2
6700	4000	52	ECG	A: 1172	2.54	1	AS.120-52-6700/9.4/IP54O2
5900	3000	45	ECG	A: 1452	3.65	1	AS.150-45-5900/9.3/IP54O2
6300	4000	45	ECG	A: 1452	3.65	1	AS.150-45-6300/9.4/IP54O2
8000	3000	67	ECG	A: 1452	3.65	1	AS.150-67-8000/9.3/IP54O2
8600	4000	67	ECG	A: 1452	3.65	1	AS.150-67-8600/9.4/IP54O2
#	Accessories (ACS)			Purchase code			
1	Cable gland for end cup PG 11			CG-PG11			

**ALED**

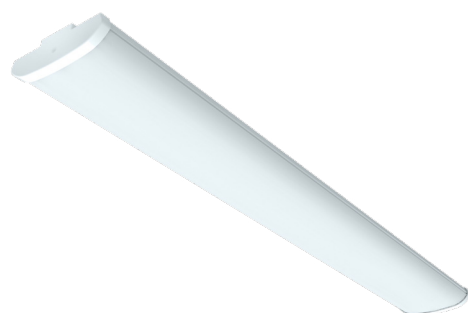

Description	Dimensions	Weight	ACS	Purchase code
	(mm)	(kg)	#	
AS 2x ..600mm,Opal diffuser IP54, cabled for LED tubes	A: 673	1.75	N/A	AS.2x.60/_/IP54O2W
AS 2x ..1200mm,Opal diffuser IP54, cabled for LED tubes	A: 1282	2.05	N/A	AS.2x120/_/IP54O2W
AS 2x ..1600mm,Opal diffuser IP54, cabled for LED tubes	A: 1583	3.05	N/A	AS.2x160/_/IP54O2W

**ALED**  
CABLED FOR LED TUBES

