

MIA

SURFACE
OPAL



LED



ECG

IP20

5 years
warranty

50,000 hrs
L80/B10
Ta=25°C

220-240V
50-60Hz




CE

Mia

MIA Small
Surface / On wall

MIA Large
Surface / On wall

LIGHT OUTPUT	960 lm	1880 lm
EFFICIENCY	74 lm/W	92 lm/W
WIRING	220-240V, 50-60Hz	220-240V, 50-60Hz
CCT	3000 - 4000K	3000 - 4000K
CRI	≥ 80 Ra	≥ 80 Ra
MATERIALS		
> Housing	Aluminium	Aluminium
> Diffuser	Opal PMMA Mat Pattern	Opal PMMA Mat Pattern
LIGHT DISTRIBUTION	Direct	Direct
ACCESSORIES	N/A	N/A

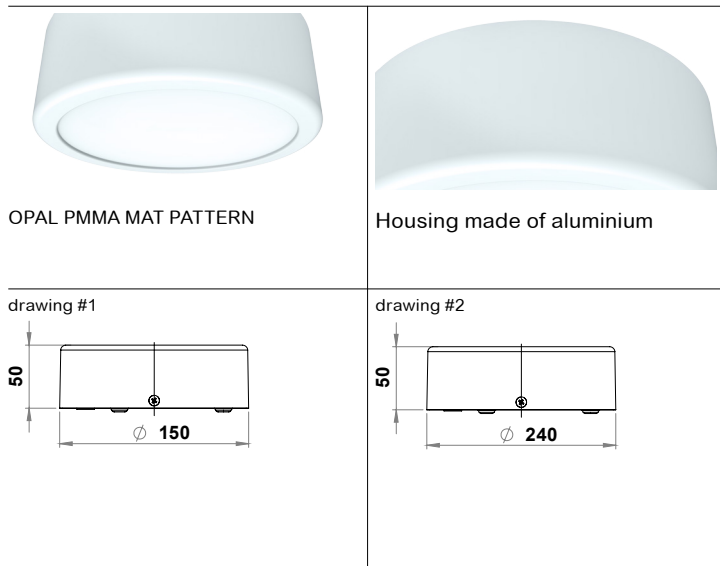

Net lumen output	CCT	Power	Wiring	Dimensions	Weight	ACS	Purchase code	MIA
(lm)	(K)	(W)		(mm)	(kg)	#		
920	3000	13	220-240V	drawing #1	0.35	N/A	MIA-R150-13-920/6.3/IP20O3W	
960	4000	13	220-240V	drawing #1	0.35	N/A	MIA-R150-13-960/6.4/IP20O3W	
1790	3000	20.5	220-240V	drawing #2	0.60	N/A	MIA-R240-20,5-1790/6.3/IP20O3W	
1880	4000	20.5	220-240V	drawing #2	0.60	N/A	MIA-R240-20,5-1880/6.4/IP20O3W	



Mareli Ltd. reserves the right to introduce structural changes and modify the luminaires
 Luminous flux and connected electrical load are subject to an initial tolerance of +/- 5%. Tolerance of color temperature: +/-150 K.
 Unless stated otherwise, the values apply to an ambient temperature of 25°C.