

5 years warranty

60,000 hrs
L80/B10
Ta=25°C


220-240V
50-60Hz



Nika IP21

Nika
Surface / Suspended

LIGHT OUTPUT	up to 6000 lm
EFFICIENCY	up to 125 lm/W
WIRING	ECG Supplied with white cable (3x0.5mm ² L=600mm)
CCT	3000 - 4000K
CRI	≥ 80 Ra
MATERIALS	
> Housing	Anodised aluminium profile
> Diffuser	Opal PMMA high diffusive on request: Opal PC
> End caps	Anodised aluminium
LIGHT DISTRIBUTION	Direct
ACCESSORIES	Single suspender 1.5 m Transparent Feeding Cable for Versuz Surface and Suspended 3 X 0.75mm ² . VDE certified cable L=1m (the length of the cable can be different)





Suspended mounting



Luminaire is equipped with feeding cable running through the end cap, also can be moved on the top

drawing

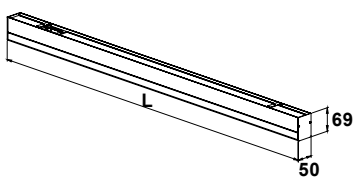


Elegant anodised aluminium end caps



Net lumen output	CCT	Power	Wiring	Dimensions	Weight	ACS	Purchase code
(lm)	(K)	(W)		(mm)	(kg)	#	
1900	3000	16	ECG	L: 575	0.64	1,2	NikaS/P.60-16-1900/4.3/IP21O5A
2000	4000	16	ECG	L: 575	0.64	1,2	NikaS/P.60-16-2000/4.4/IP21O5A
3800	3000	32	ECG	L: 1135	0.88	1,2	NikaS/P.120-32-3800/4.3/IP21O5A
4000	4000	32	ECG	L: 1135	0.88	1,2	NikaS/P.120-32-4000/4.4/IP21O5A
4750	3000	40	ECG	L: 1415	1.22	1,2	NikaS/P.150-40-4750/4.3/IP21O5A
5000	4000	40	ECG	L: 1415	1.22	1,2	NikaS/P.150-40-5000/4.4/IP21O5A
5700	3000	48	ECG	L: 1695	1.73	1,2	NikaS/P.170-48-5700/4.3/IP21O5A
6000	4000	48	ECG	L: 1695	1.73	1,2	NikaS/P.170-48-6000/4.4/IP21O5A
#	Accessories (ACS)			Purchase code			
1	Single suspender 1.5 m			ACSus/VerP 1/1.5			
2	Transparent Feeding Cable for Versuz Surface and Suspended 3 X 0.75mm ² VDE certified cable L=1m (the length of the cable can be different)			AC/TC/Ver 3/1*			

NIKA

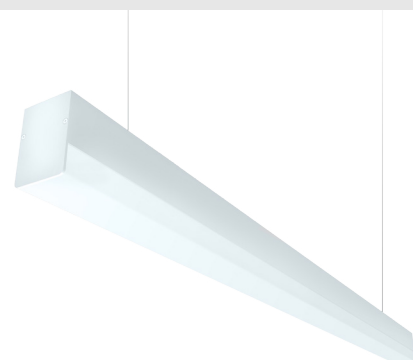

Mareli Ltd. reserves the right to introduce structural changes and modify the luminaires. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 5%. Tolerance of color temperature: +/-150 K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.