

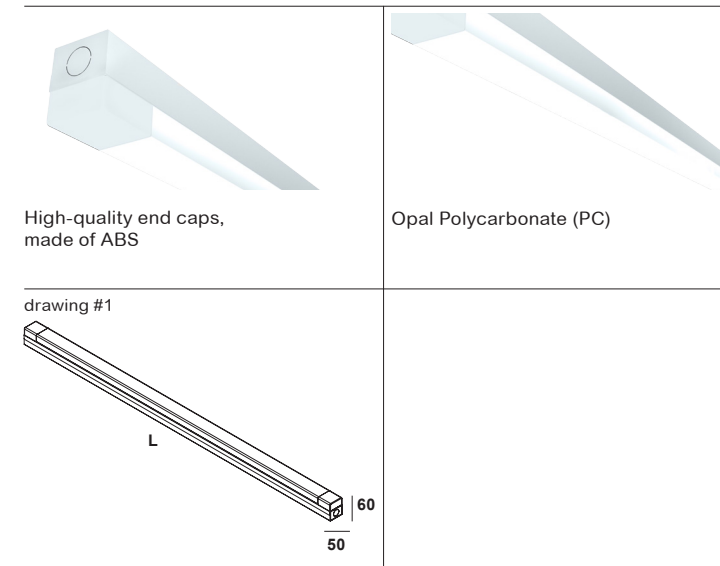


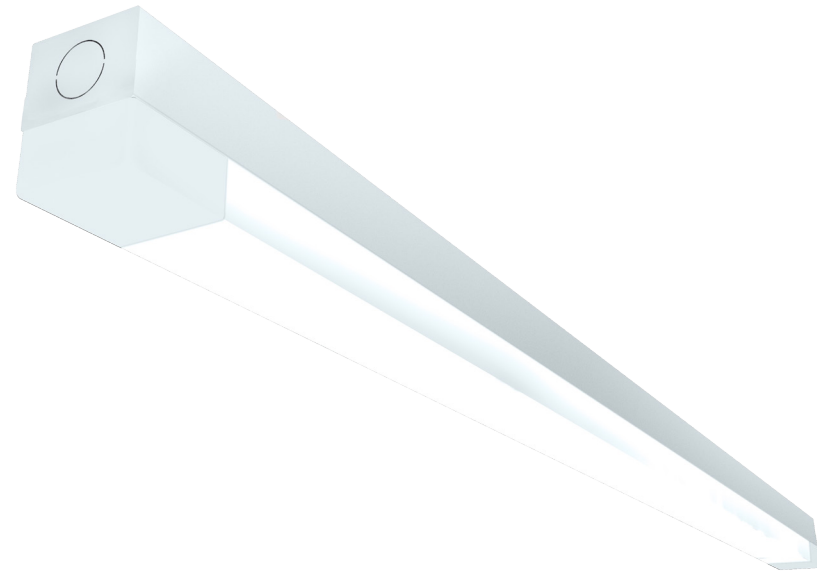

S-LED

SURFACE
OPAL

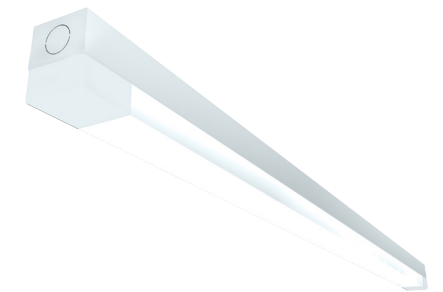

Net lumen output	CCT	Power	Wiring	Dimensions	Weight	ACS	Purchase code	S-LED OPAL
(lm)	(K)	(W)		(mm)	(kg)	#		
4000	4000	32	ECG	L: 1252	0,64	N/A	SLedS.120-32-4000/4.4/IP21O2	
5000	4000	40	ECG	L: 1552	0,64	N/A	SLedS.150-40-5000/4.4/IP21O2	



5 years warranty
50,000 hrs
L80/B10
 Ta=25°C
 220-240V
 50-60Hz



S-LED IP21

S-LED
Surface

LIGHT OUTPUT	up to 5000 lm
EFFICIENCY	125 lm/W
WIRING	ECG, on request: DALI, 1-10V On request: Emergency kit (1h, 3h)
CCT	4000K
CRI	≥ 80 Ra
MATERIALS	
> Housing	Sheet steel
> Diffuser	Opal polycarbonate (PC)
> End caps	ABS
LIGHT DISTRIBUTION	Direct
ACCESSORIES	N/A