


VERSUZ

SURFACE / SUSPENDED / IP21

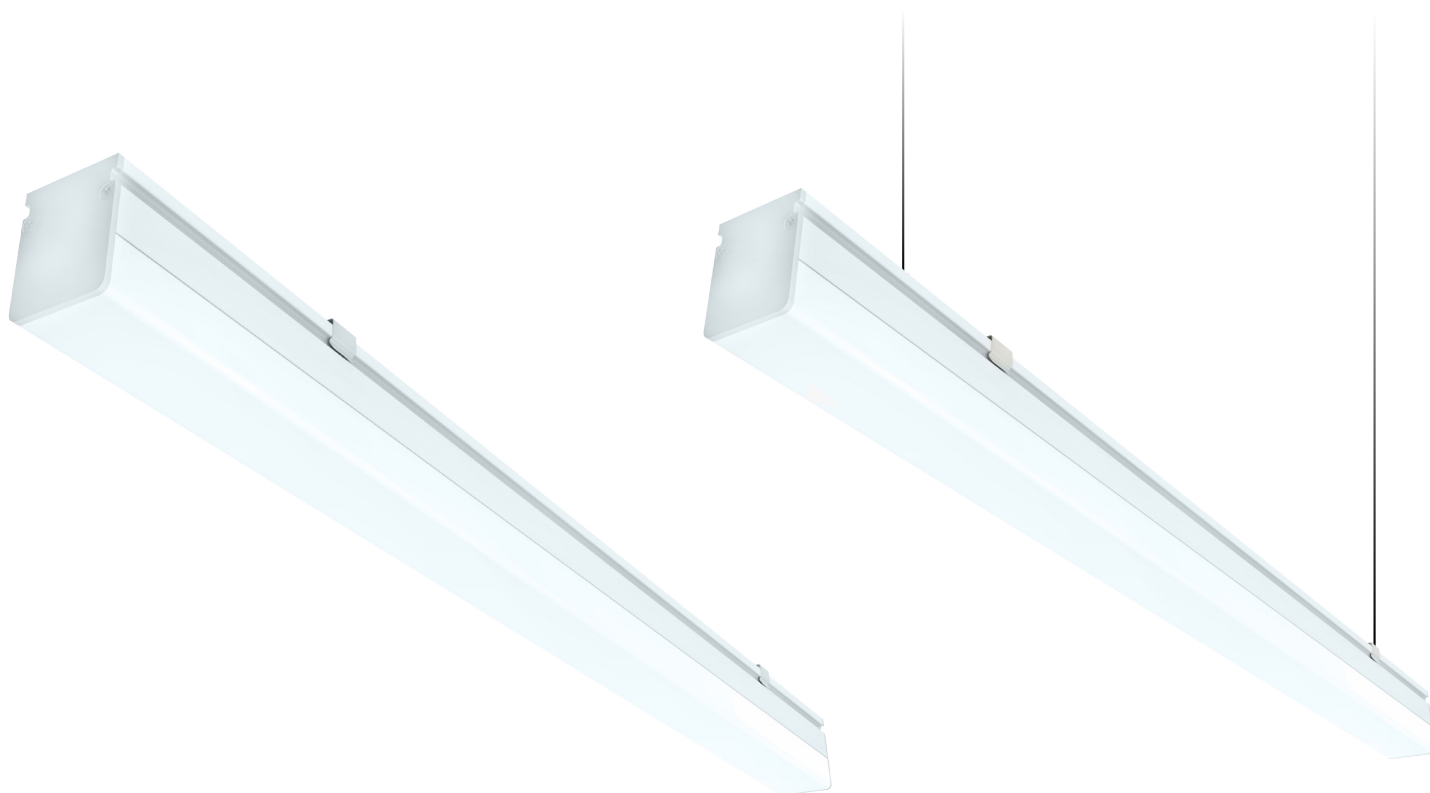

3 years
warranty

30,000 hrs
L70/B50
Ta=25°C

220-240V
50-60Hz



Versuz IP21

S IP21

Surface / Suspended

LIGHT OUTPUT

up to 3420 lm

EFFICIENCY

up to 122 lm/W

WIRING

Input Voltage: 170-240VAC 50-60Hz
Ambient Temp: -10~35 °C
Supplied with white cable (3x0.5mm² L=600mm)

CCT

3000 - 4000K

CRI

≥ 80 Ra

MATERIALS

> Housing

Anodised aluminium profile

> Diffuser

Opal PMMA high diffusive
on request: Opal PC

> End caps


Anodised aluminium

LIGHT DISTRIBUTION

Direct

ACCESSORIES

Single suspender 1.5 m
Transparent Feeding Cable for Versuz Surface and Suspended
3 X 0.75mm².
VDE certified cable L=1m (the length of the cable can be different)





Suspended mounting



Luminaire is equipped with feeding cable running through the end cap, also can be moved on the top

drawing



Elegant anodised aluminium end caps



Additionally rocker switch

Net lumen output	CCT	Power	Wiring	Dimensions	Weight	ACS	Purchase code
(lm)	(K)	(W)		(mm)	(kg)	#	
1050	3000	10	ECG	L: 586	0.34	1,2	VerS/P.60-10-1050/10.3/IP21O5A*
1140	4000	10	ECG	L: 586	0.34	1,2	VerS/P.60-10-1140/10.4/IP21O5A*
1300	3000	12.5	ECG	L: 874	0.48	1,2	VerS/P.90-12.5-1300/10.3/IP21O5A*
1415	4000	12.5	ECG	L: 874	0.48	1,2	VerS/P.90-12.5-1415/10.4/IP21O5A*
2020	3000	19	ECG	L: 1162	0.62	1,2	VerS/P.120-19-2020/10.3/IP21O5A*
2195	4000	19	ECG	L: 1162	0.62	1,2	VerS/P.120-19-2195/10.4/IP21O5A*
3145	3000	28	ECG	L: 1450	0.73	1,2	VerS/P.150-28-3145/10.3/IP21O5A*
3420	4000	28	ECG	L: 1450	0.73	1,2	VerS/P.150-28-3420/10.4/IP21O5A*
#	Accessories (ACS)			Purchase code			
1	Single suspender 1.5 m			ACSus/VerP 1/1.5			
2	Transparent Feeding Cable for Versuz Surface and Suspended 3 X 0.75mm ² .VDE certified cable L=1m (the length of the cable can be different)			AC/TC/Ver 3/1*			


VERSUZ



Mareli Ltd. reserves the right to introduce structural changes and modify the luminaires. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 5%. Tolerance of color temperature: +/-150 K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

VERSUZ

SURFACE / SUSPENDED / IP54

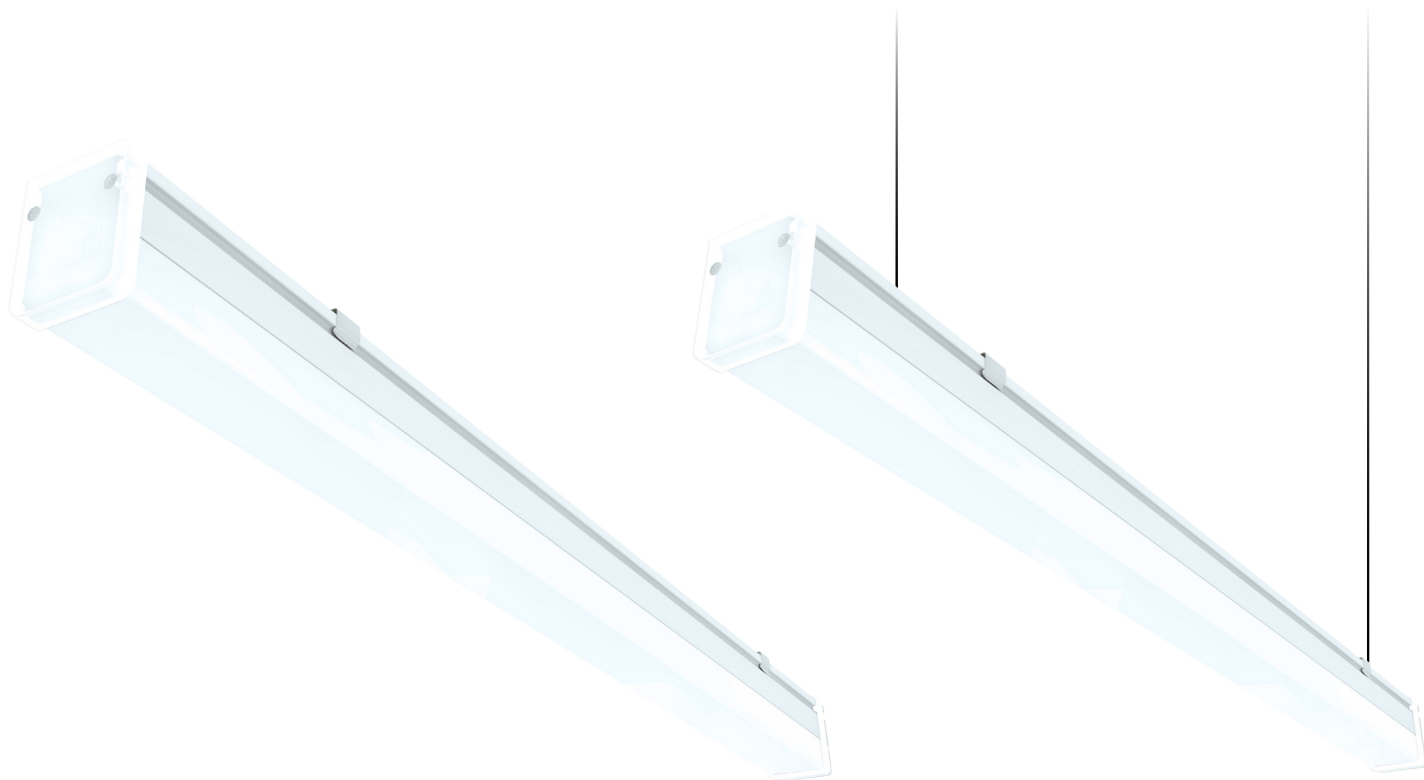

3 years
warranty

30,000 hrs
L70/B50
Ta=25°C

220-240V
50-60Hz



Versuz IP54

S IP54

Surface / Suspended

LIGHT OUTPUT

up to 3420 lm

EFFICIENCY

up to 122 lm/W

WIRING

Input Voltage: 170-240VAC 50-60Hz
Ambient Temp: -10~35 °C
Supplied with white cable (3x0.5mm² L=600mm)

CCT

3000 - 4000K

CRI

≥ 80 Ra

MATERIALS

> Housing

Anodised aluminium profile

> Diffuser

Opal PMMA high diffusive
on request: Opal PC

> End caps


Transparent PC

LIGHT DISTRIBUTION

Direct

ACCESSORIES

Single suspender 1.5 m
Transparent Feeding Cable for Versuz Surface and Suspended
3 X 0.75mm².
VDE certified cable L=1m (the length of the cable can be different)





Suspended mounting



Luminaire is equipped with feeding cable running through the end cap, also can be moved on the top

drawing



Special end caps for IP54 protection

Net lumen output	CCT	Power	Wiring	Dimensions	Weight	ACS	Purchase code
(lm)	(K)	(W)		(mm)	(kg)	#	
1050	3000	10	ECG	L: 586	0.34	1,2	VerS/P.60-10-1050/10.3/IP54O5A
1140	4000	10	ECG	L: 586	0.34	1,2	VerS/P.60-10-1140/10.4/IP54O5A
1300	3000	12.5	ECG	L: 874	0.48	1,2	VerS/P.90-12.5-1300/10.3/IP54O5A
1415	4000	12.5	ECG	L: 874	0.48	1,2	VerS/P.90-12.5-1415/10.4/IP54O5A
2020	3000	19	ECG	L: 1162	0.62	1,2	VerS/P.120-19-2020/10.3/IP54O5A
2195	4000	19	ECG	L: 1162	0.62	1,2	VerS/P.120-19-2195/10.4/IP54O5A
3145	3000	28	ECG	L: 1450	0.73	1,2	VerS/P.150-28-3145/10.3/IP54O5A
3420	4000	28	ECG	L: 1450	0.73	1,2	VerS/P.150-28-3420/10.4/IP54O5A
#	Accessories (ACS)			Purchase code			
1	Single suspender 1.5 m			ACSus/VerP 1/1.5			
2	Transparent Feeding Cable for Versuz Surface and Suspended 3 X 0.75mm ² .VDE certified cable L=1m (the length of the cable can be different)			AC/TC/Ver 3/1*			


VERSUZ



Mareli Ltd. reserves the right to introduce structural changes and modify the luminaires. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 5%. Tolerance of color temperature: +/-150 K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

VERSUZ

SURFACE IN LINE / SUSPENDED IN LINE / IP21

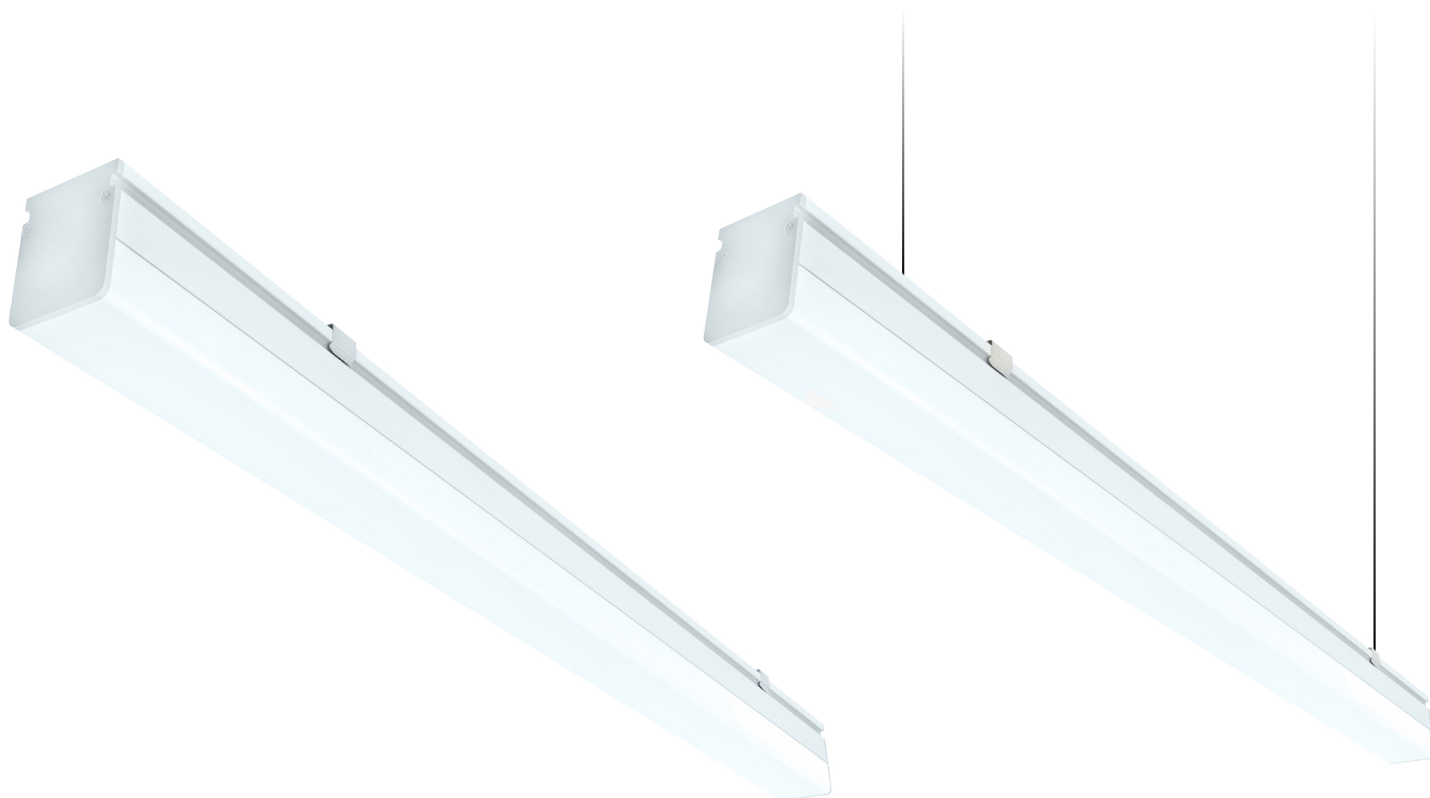

LED				IP21	3 years warranty	30,000 hrs L70/B50 Ta=25°C	220-240V 50-60Hz		CE
-----	--	--	--	------	------------------	----------------------------------	---------------------	--	----

Versuz in line


S/L IP21

Surface in line up to 25 meters
Electric connectors and connection bracket are included


P/L IP21

Suspended in line up to 25 meters
Electric connectors and connection bracket are included


LIGHT OUTPUT	up to 3420 lm	up to 3420 lm
EFFICIENCY	up to 122 lm/W	up to 122 lm/W
WIRING	Input Voltage: 170-240VAC 50-60Hz Ambient Temp: -10~35 °C	Input Voltage: 170-240VAC 50-60Hz Ambient Temp: -10~35 °C
CCT	3000 - 4000K	3000 - 4000K
CRI	≥ 80 Ra	≥ 80 Ra
MATERIALS		
> Housing	Anodised aluminium profile	Anodised aluminium profile
> Diffuser	Opal PMMA high diffusive on request: Opal PC	Opal PMMA high diffusive on request: Opal PC
> End caps	Anodised aluminium	Anodised aluminium
LIGHT DISTRIBUTION	Direct	Direct
ACCESSORIES	Feeding Cable for Versuz Surface and Suspended For in-line connection 3x1,5mm ² , L=1,5m	Single suspender 1.5 m Feeding Cable for Versuz Surface and Suspended For in-line connection 3x1,5mm ² , L=1,5m



Suspended mounting



Luminaire is equipped with feeding cable running through the end cap, also can be moved on the top


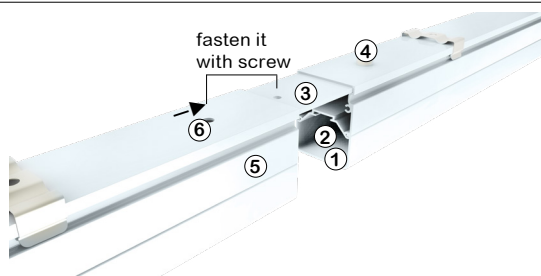


Luminaire can be mounted in continuous line, up to 25 meters

- 1) remove end caps
- 2) connect luminaires each other with special connectors for easy set up (fig. #1)
- 3) place the special connection bracket
- 4) fasten it with screw
- 5) connect other luminaire
- 6) fasten it with screw




drawing



Elegant anodised aluminium end caps

Net lumen output	CCT	Power	Wiring	Dimensions	Weight	ACS	Purchase code
(lm)	(K)	(W)		(mm)	(kg)	#	
SURFACE IN LINE							
1050	3000	10	ECG	L: 586	0,34	1	VerS/L.60-10-1050/10.3/IP21O5A
1140	4000	10	ECG	L: 586	0,34	1	VerS/L.60-10-1140/10.4/IP21O5A
1300	3000	12.5	ECG	L: 874	0,48	1	VerS/L.90-12.5-1300/10.3/IP21O5A
1415	4000	12.5	ECG	L: 874	0,48	1	VerS/L.90-12.5-1415/10.4/IP21O5A
2020	3000	19	ECG	L: 1162	0,62	1	VerS/L.120-19-2020/10.3/IP21O5A
2195	4000	19	ECG	L: 1162	0,62	1	VerS/L.120-19-2195/10.4/IP21O5A
3145	3000	28	ECG	L: 1450	0,73	1	VerS/L.150-28-3145/10.3/IP21O5A
3420	4000	28	ECG	L: 1450	0,73	1	VerS/L.150-28-3420/10.4/IP21O5A
SUSPENDED IN LINE							
1050	3000	10	ECG	L: 586	0,34	1	VerP/L.60-10-1050/10.3/IP21O5A
1140	4000	10	ECG	L: 586	0,34	1	VerP/L.60-10-1140/10.4/IP21O5A
1300	3000	12.5	ECG	L: 874	0,48	1	VerP/L.90-12.5-1300/10.3/IP21O5A
1415	4000	12.5	ECG	L: 874	0,48	1	VerP/L.90-12.5-1415/10.4/IP21O5A
2020	3000	19	ECG	L: 1162	0,62	1	VerP/L.120-19-2020/10.3/IP21O5A
2195	4000	19	ECG	L: 1162	0,62	1	VerP/L.120-19-2195/10.4/IP21O5A
3145	3000	28	ECG	L: 1450	0,73	1	VerP/L.150-28-3145/10.3/IP21O5A
3420	4000	28	ECG	L: 1450	0,73	1	VerP/L.150-28-3420/10.4/IP21O5A
#	Accessories (ACS)			Purchase code			
1	Single suspender 1.5 m			ACSus/VerP 1/1.5			
2	Transparent Feeding Cable for Versuz Surface and Suspended 3 X 0.75mm ² VDE certified cable L=1m (the length of the cable can be different)			AC/TC/Ver 3/1*			

VERSUZ

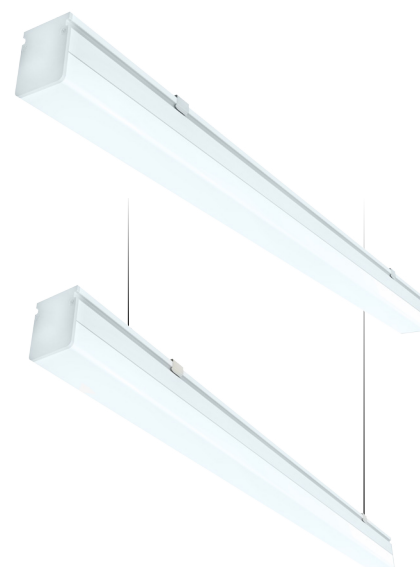

Mareli Ltd. reserves the right to introduce structural changes and modify the luminaires. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 5%. Tolerance of color temperature: +/-150 K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.