



Elara

Outdoor
Wall and Ceiling Luminaire


Mareli Ltd



Elara Preview



Solid Aluminium
Die-Casted Body
Salt Spray tested
Powder Coating

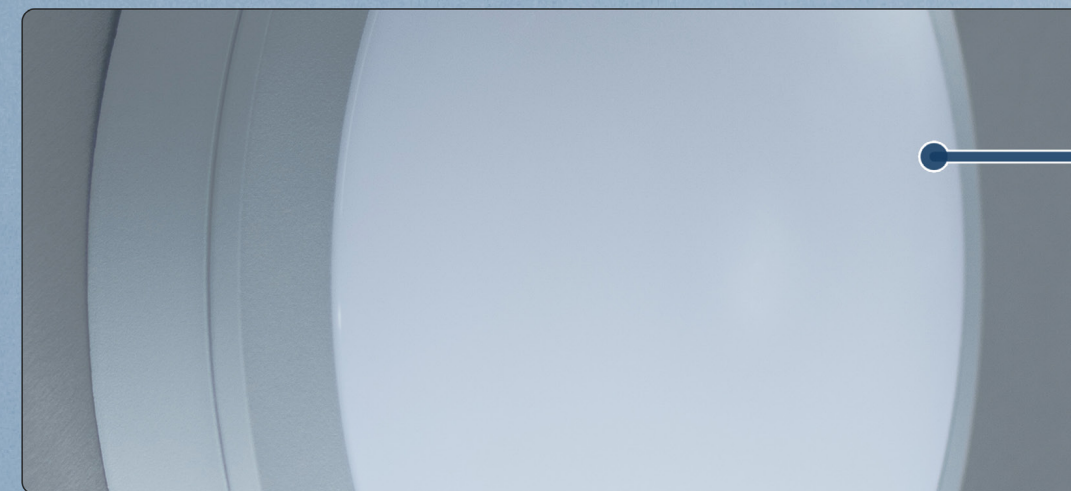

Engineered by Mareli,
the diffuser integrates
a non-yellowing material
with a refined satin
structure for high
efficiency and perfectly
uniform light distribution



*Option for
Vandal-proof screws

*Option for
Integrated PIR Sensor

Mareli Ltd

Technical Characteristics

Elara

Mareli Ltd

Standard



Specifications

Mounting	Wall & Ceiling Mounting
Light Source	LED
Materials	Housing: Aluminium Body Polycarbonate Diffuser
Sensor Types	Presence sensor *on request*
Luminaire efficacy	up to 140 lm/W
Warranty	5 years
Beam Angle	110 Degrees
Colour Temperature	4000K, 3000K *others on request *
Colour Rendering Index	≥ 80 CRI
Rated Median useful life	80.000 h. L80B10
Ingress protection	IP65
IK Rating	08
Glow-wire test	850 degrees, 30 seconds
Photobiological risk	RGO
Flammability rating	Flammability rating: UL 94 V-2

Product Purchase Codes				
Lumen Output	CCT	Power	Dimensions	Purchase Code
lm	K	W	mm	
Elara				
2800	4000	20	Dia: 350mm H: 65mm	ELARA Ø 350mm - 20W / 2800lm / 4000K / IP65 / OPAL

RAL 9005 - Jet Black



RAL 9008 - Anthracite Grey



RAL 9003 - Signal White

