

# Linea 50

Slim and Timeless

*Mareli Ltd*



# Linea 50

## Advantages

- No Visible Screws
- Future Proof Module replacement
- Wall Mounting option available
- In-House Production of High Performance Microprismatic Diffuser

# Product Specifications

## INSTALLATION

Suspended, Surface, Wall

## LENGTH


up to 2250 mm standart profiles

## LIGHT DISTRIBUTION



Direct &  
Direct / Indirect\*

## LUMEN OUTPUT

up to 8200 lm with standart modules  
Higher output on request\*




Extruded  
Microprismatic Diffuser

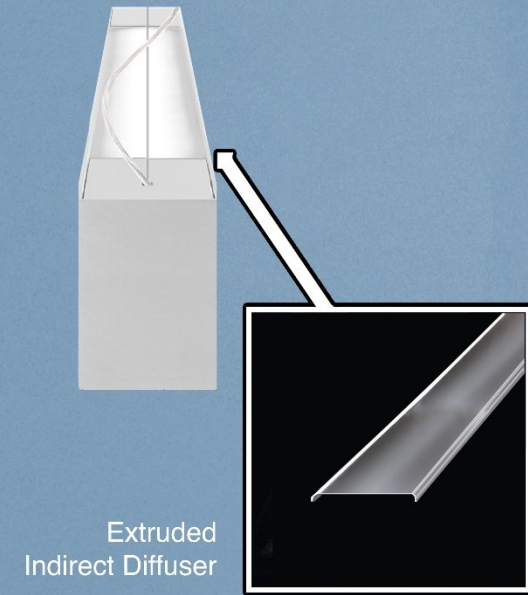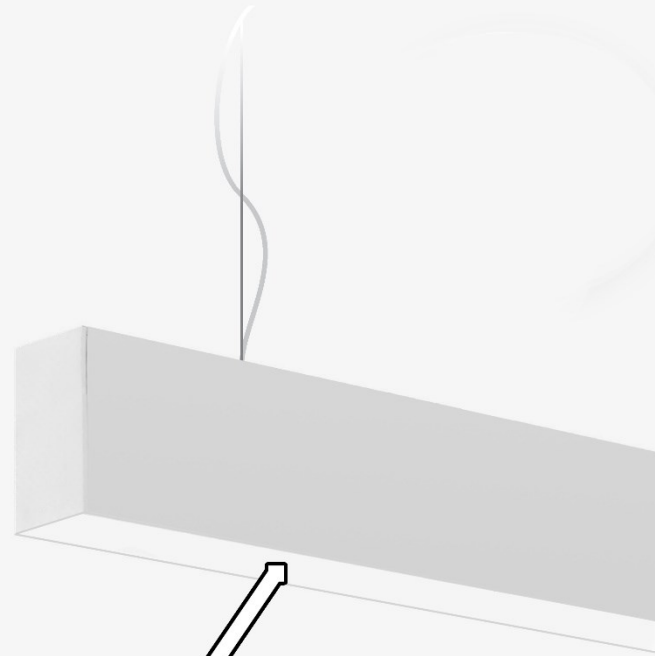

Extruded  
Indirect Diffuser



# Technical Characteristics



- **Standart modules colour temperature: 4000K, CRI>80**  
On Request 3000K; 5000K; CRI>90
- **Module Endurance: 80 000 hours / L80B20 at tc=85 C**  
Minimum chip colour tolerance: 3MacAdam (3SDCM)
- **Driver options:**  
  - On / Off** - Selectable current output via DIP Switch
  - DALI** - Push Switch
  - Light output level in DC operation:  
Programmable 1-100%
- **Ingress Protection code: IP 40**



- **High Performace Opal Microprismatic Diffuser**



CODE	Lenght (mm)	Power (W)	Light Source	Net Lumen Output (lm)	Colour Rendering Index (Ra)	Colour Temperature (K)
Linea 50-S/P/W. 567x50x72-17-2100/9.4/IP40OMPW	567	17	LED	2100	≥ 80 Ra	4000K
Linea 50-S/P/W. 567x50x72-17-1900/9.3/IP40OMPW				1900		3000K
Linea 50-S/P/W. 847x50x72-26-3200/9.4/IP40OMPW	847	26		3200		4000K
Linea 50-S/P/W. 847x50x72-26-2900/9.3/IP40OMPW				2900		3000K
Linea 50-S/P/W. 1127x50x72-34-4100/9.4/IP40OMPW	1127	34		4100		4000K
Linea 50-S/P/W. 1127x50x72-34-3740/9.3/IP40OMPW				3740		3000K
Linea 50 DIR/IND-P. 1127x50x72-34/6-4100/800/9.4/IP40OMPW				4900		4000K
Linea 50-S/P/W. 1407x50x72-43-5200/9.4/IP40OMPW	1407	43		5200		4000K
Linea 50-S/P/W. 1407x50x72-43-4730/9.3/IP40OMPW				4730		3000K
Linea 50 DIR/IND-P. 1407x50x72-43/10-5200/1300/9.4/IP40OMPW				6500		4000K
Linea 50-S/P/W. 1687x50x72-51-6300/9.4/IP40OMPW	1687	51		6300		4000K
Linea 50-S/P/W. 1687x50x72-51-5720/9.3/IP40OMPW				5720		3000K
Linea 50 DIR/IND-P. 1687x50x72-51/13-6300/1700/9.4/IP40OMPW				8000		4000K
Linea 50-S/P/W. 2250x50x72-68-8200/9.4/IP40OMPW	2250	68		8200		4000K
Linea 50-S/P/W. 2250x50x72-68-7500/9.3/IP40OMPW			7500	3000K		
Linea 50 DIR/IND-P. 2250x50x72-67/17-8200/2250/9.4/IP40OMPW			10450	4000K		

Production tolerance of luminous flux and efficiency: ±10%

## Lighting Distribution



Brackets for Wall Mounting

## Drawings

