


Elisa

And around it goes

*Mareli Ltd*

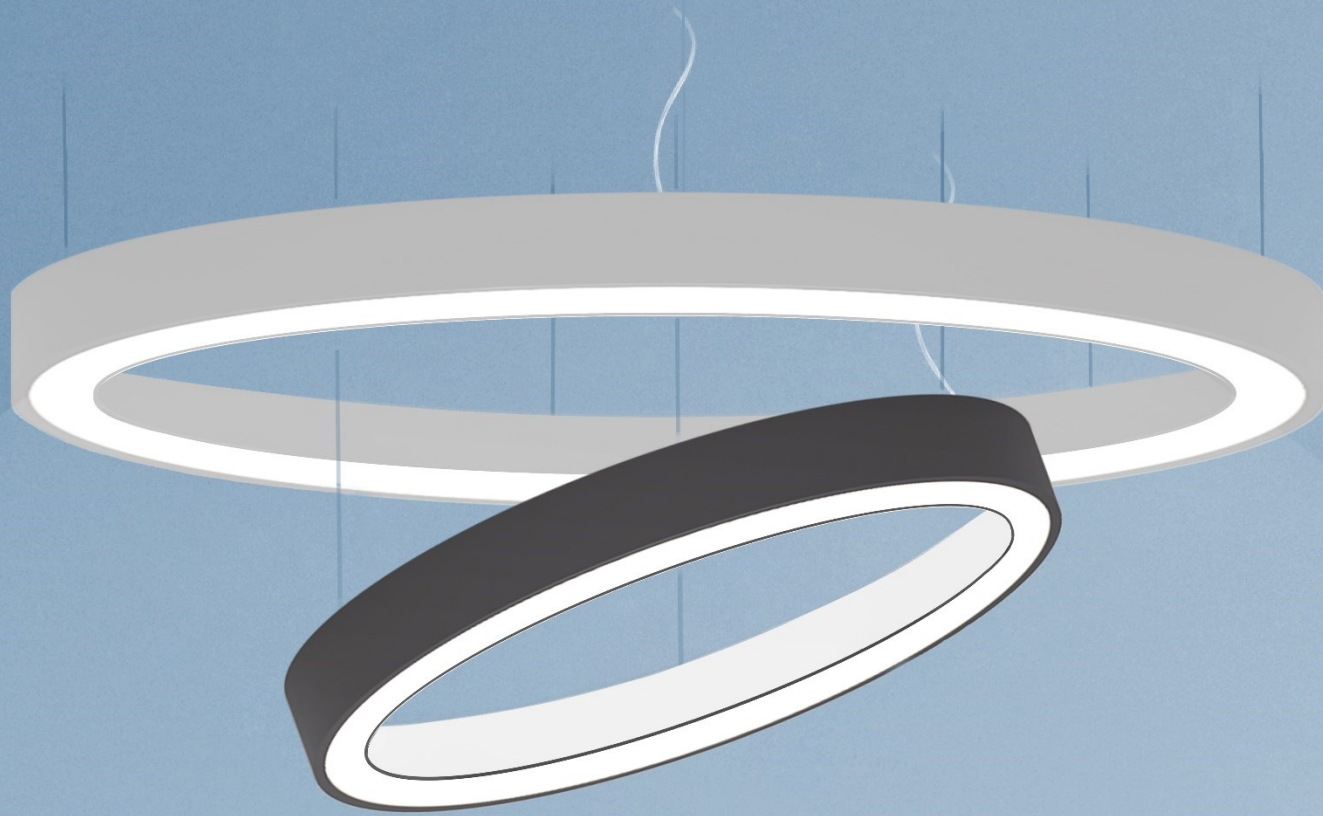

# Elisa

## Advantages

- High Lumen Output
- Homogenous Lighting
- LED Modules for Performance  
LED Strips for Budget Variant
- Different Outer and Inner Ring Colours  
Available on request



# Product Specifications

## INSTALLATION

Suspended, Surface

## Height

65mm

## Diameter

- ∅ Outer 600mm, Inner 470 mm
- ∅ Outer 900, Inner 770 mm
- ∅ Outer 1200, Inner 1070 mm

\* Other Dimensions on request

## LIGHT DISTRIBUTION

Direct


\*Indirect on request

## LUMEN OUTPUT

from 3400 lm to 12300 lm



# Technical Characteristics



## Functions of Driver

**On / Off** - Selectable current output via DIP switch

## Standart Model - 4000K ; CRI>80

On request 3000 K ; 5000L; CRI>90

**Lifetime: 80 000 hours / L80B20 at tc= 85°C / ITM21**

**5 Year warranty with LED Modules / 2 years with LED Strips**

## Materials:

**Aluminium Construction**

**PMMA Diffuser ( on request PC)**

## Surface Finish:


**White Matte** 

**Grey Matte** 

**Black Matte** 

Other colours on request\*

## Drawings

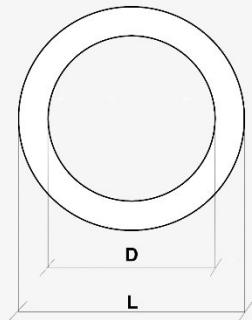

*Mareli Ltd*

## LED Module Configuration - Low Voltage Solution

Lumen Output	CCT	Power	Efficiency	Dimensions	Purchase Code
lm	K	W	lm/W	mm	

### Range of Elisa 600x470x65 - Controlled via DIP Switch Driver

3400	4000	27	125	L- 600	Elisa R -S/P 600x470x65-up to 50watts /up to 6100Lm/9.4/IP40MPF_W/B/G
6100		50	122	D- 470	

### Range of Elisa 900x770x65 - Controlled via DIP Switch Driver

5000	4000	41	123	L- 900	Elisa R -S/P 900x770x65-up to 80 watts /up to 9200Lm/9.4/IP40MPF_W/B/G
9200		80	115	D- 770	

### Range of Elisa 1200x1070x65 - Controlled via DIP Switch Driver

6800	4000	56	122	L- 1200	Elisa R -S/P 1200x1070x65-up to 110watts /up to 12300Lm/9.4/IP40MPF_W/B/G
12300		110	112	D- 1070	

## LED Strips Configuration - 24 V Solution

Lumen Output	CCT	Power	Efficiency	Dimensions	Purchase Code
lm	K	W	lm/W	mm	

### Range of Elisa 600x470x65

3100	4000	38	82	L- 600	Elisa R -S/P 600x470x65-up to 60watts /up to 4900Lm/11.4/IP40MPF_W/B/G
4900		60	82	D- 470	

### Range of Elisa 900x770x65

4600	4000	56	82	L- 900	Elisa R -S/P 900x770x65-up to 90 watts /up to 7400Lm/11.4/IP40MPF_W/B/G
7400		90	82	D- 770	

### Range of Elisa 1200x1070x65

6100	4000	74	82	L- 1200	Elisa R -S/P 1200x1070x65-up to 110watts /up to 9100Lm/11.4/IP40MPF_W/B/G
9100		110	82	D- 1070	

Indirect Lighting Distribution on request\*

\* Other Dimensions on request

Production tolerance of luminous flux and efficiency  $\pm 10\%$