


Air Luce

Recessed Triangular Luminaire

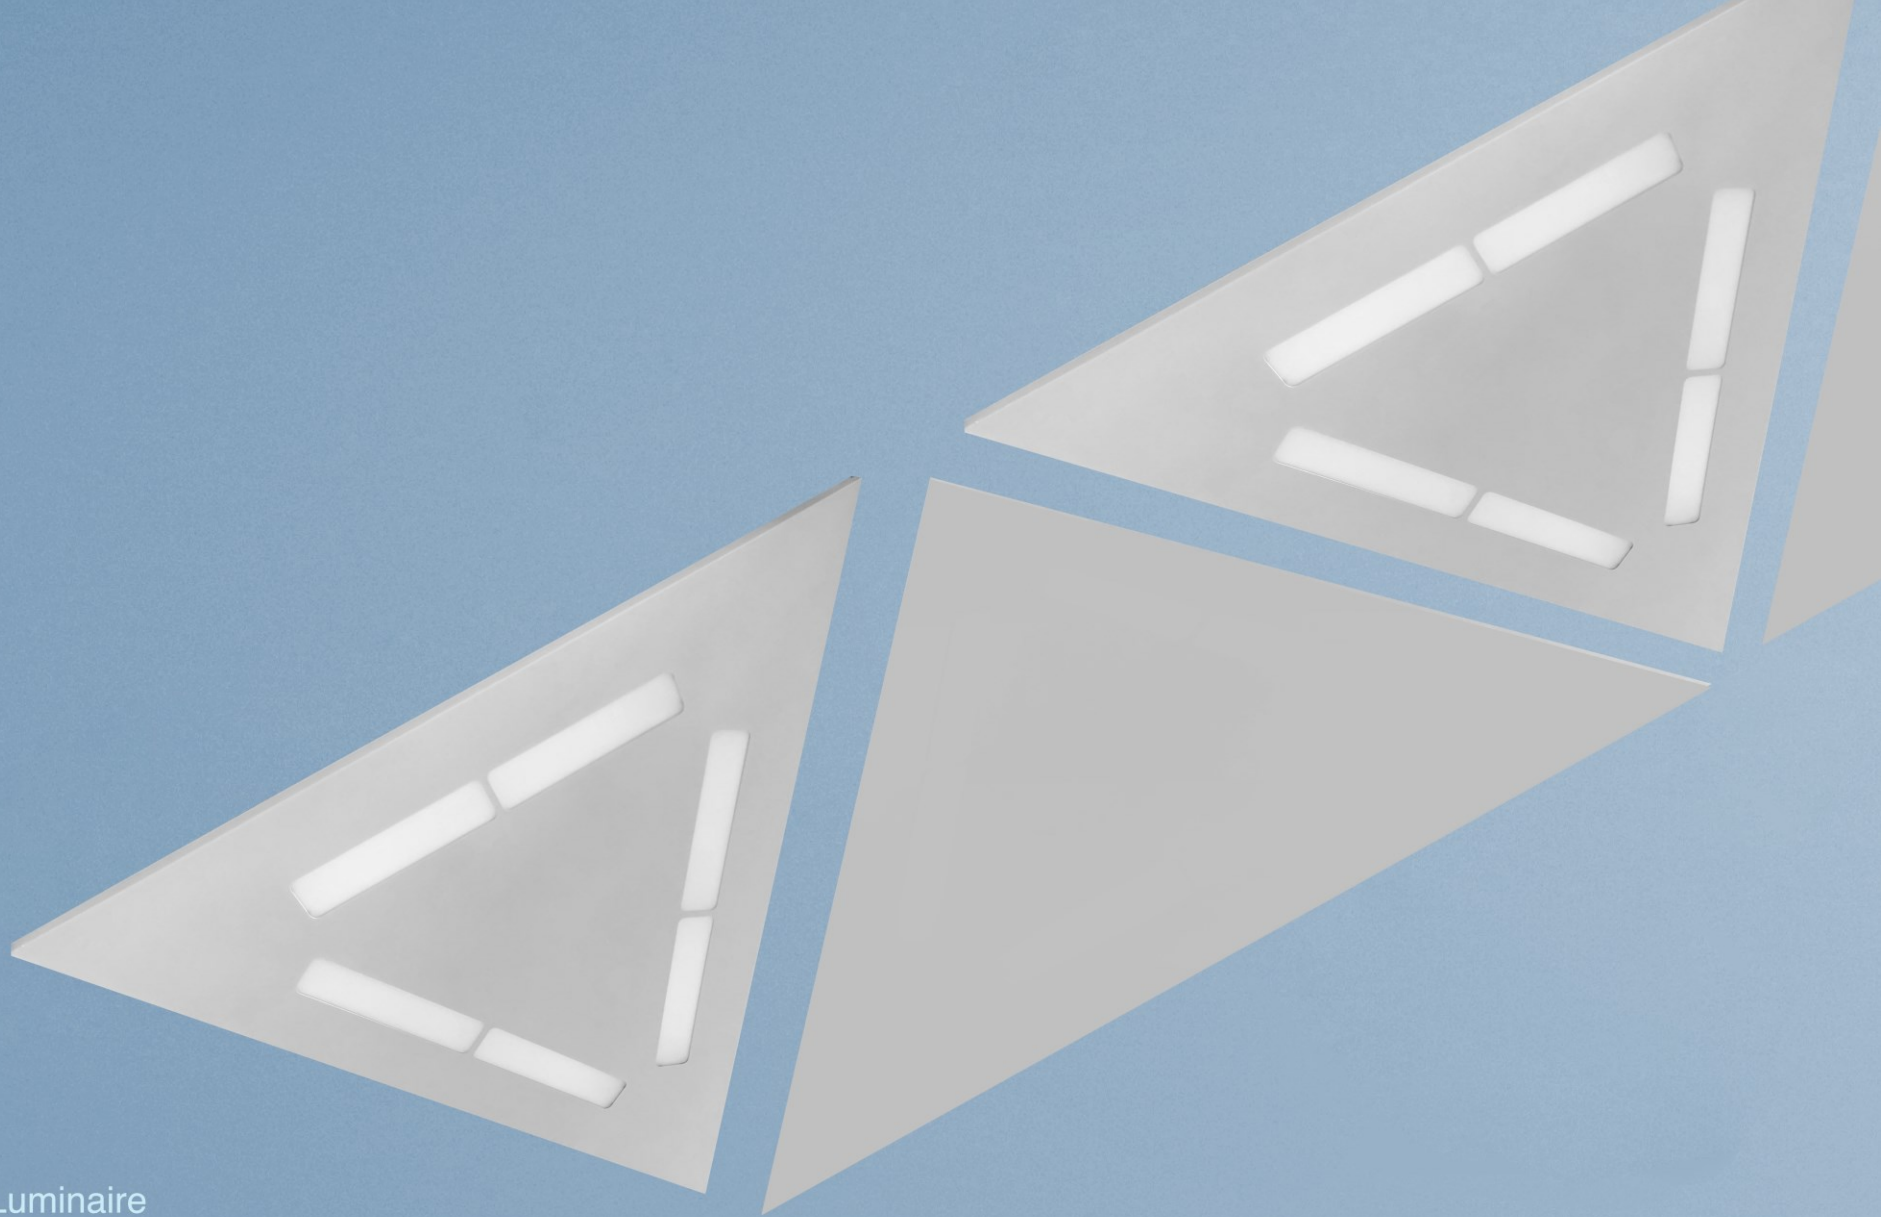

Product Specifications

INSTALLATION

Recessed

Dimensions




3x 1190mm

LIGHT DISTRIBUTION

Direct

LUMEN OUTPUT

5000lm

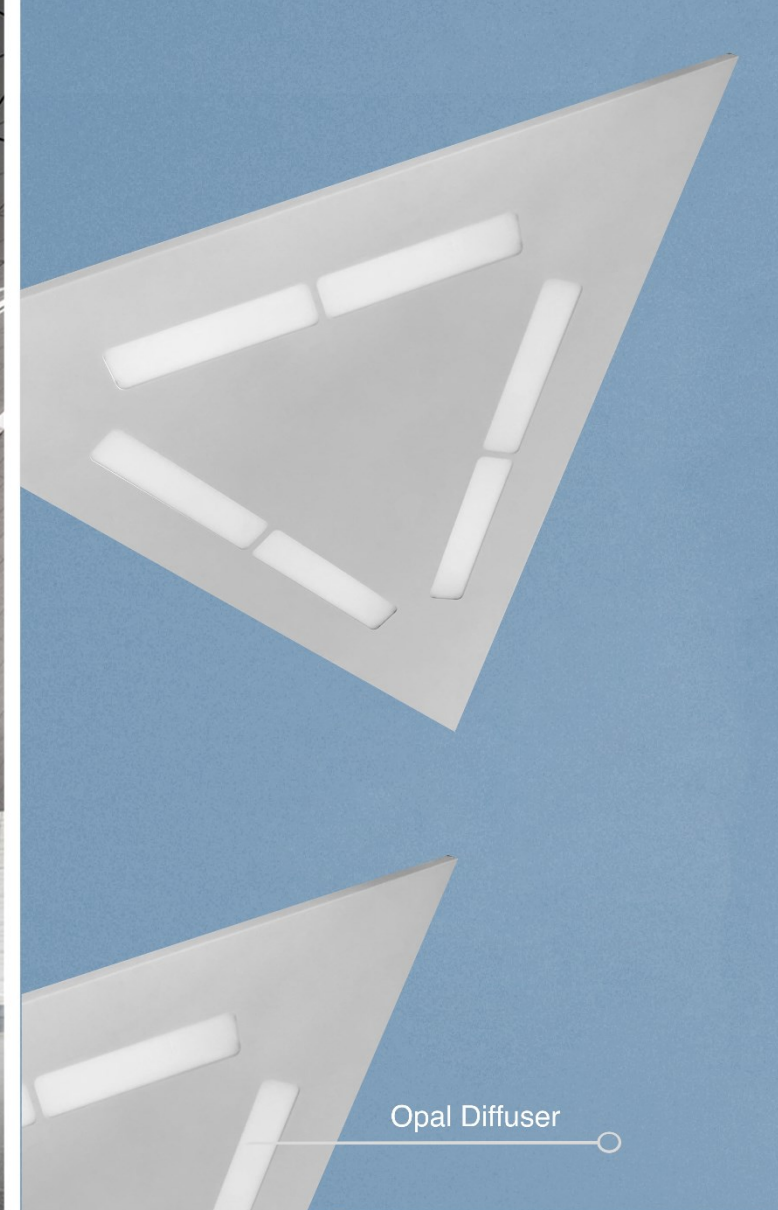

Technical Characteristics




- **Standart Modules colour temperature: 4000K, CRI>80**
- **LED Module Endurance: 80 000 hours / L80B20**
Minimum chip colour tolerance: 3MacAdam (3SDCM)
- **Driver options:**
On / Off - Selectable current output via DIP Switch
- **Ingress Protection code: IP 40**
Impact Protection: IK 06
- **5 Year warranty**
- **Surface Finish:**
Gray Matte Fine Texture (RAL 9006)
- **Materials:**
Sheet Metal Construction
High Performance Opal PMMA Diffuser
- **Input Voltage, Frequency - 220-240 V / 50 - 60 Hz**
- **Power Factor: 0.9**
- **Ambient Temperature: -5° to +45° C**
- **Accessories: Six Brackets per Luminaire for Recessed Mounting**

CODE	Lenght (mm)	Power (W)	Light Source	Net Lumen Output (lm)	Colour Rendering Index (Ra)	Colour Temperature (K)
Air Luce 45 W / 5000Lm / 4000K /CRI80	3x1190	45	LED	5000	≥ 80 Ra	4000K

Production tolerance of luminous flux and efficiency: ±10%


Lighting Distribution

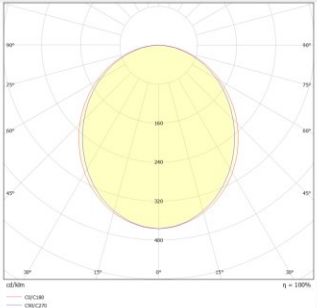

Opal Diffuser

Drawings

Front

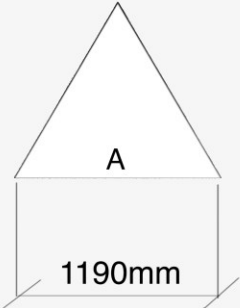

Side

